





Snubber

The damping is done by a freely moveable needle. Snubbers are insensitive to dirt and need no maintenance. The damping effectiveness though is less in comparison to pressure peak damping elements.




Dimensions	Connection thread	Material		Medium
		Brass	Stainless steel 1.4435	
 G1/4" male G1/4" female		F3	K3	Heavy oil
		F4	K4	Light crude
		F5	K5	Water / Air
 G1/4" male G1/2" male		F8	K8	Water / Air
 G1/4" male 1/2" NPT male			S9	Water / Air
 G1/2" female G1/2" male		H2	S2	Light crude
			S3	Water / Air

Pressure peak damping element

Pressure peak damping elements are important for all applications where liquid hammers, pressure peaks may occur. These can create very short pressure peaks which exceed the max. permitted pressure. This happens often in applications with quick opening and closing of valves as well as toothed wheel pumps. Even at viscosities of >100cSt the response time of the transmitter will be lower than 5 ms.



Dimensions	Connection thread	Material		Medium
		Brass	Stainless steel 1.4435	
	G1/4" male G1/4" female	F1	K1	Light crude


Hex-socket set screw

Material: 1.4404

Retrofit kit for pressure connections (e.g. G1/4" male) with integrated M5 internal thread.

Set with 5 pcs.



Dimensions	Diameter restriction	Ordering code	Description	Medium
	0.4 mm	44	DAMP0.4	Air / Water / Light crude
	1.0 mm	40	DAMP1.0	Heavy oil






Accessories

for transmitter and pressure switches





Adapters

Pressure adapters with different thread combinations and materials for individual applications.



Dimensions	Connection thread	Material	
		Brass	Stainless steel 1.4435
 Ø 20.5 HEX19 G1/8" (8) 20 28 G1/4" G1/8" male G1/4" female		A5	
 G1/4" 12 HEX22 20 42 G3/8" G1/4" male G3/8" male		A1	D1
 G1/4" 12 HEX22 20 42 G1/2" G1/4" male G1/2" male		A2	D2
 G1/4" 12 HEX22 21 43 1/2"NPT G1/4" male G1/2" NPT male		L7	
 G1/4" 12 HEX22 37 M12x1.5x13 G1/4" male M12x1.5 female			P1


Adapters

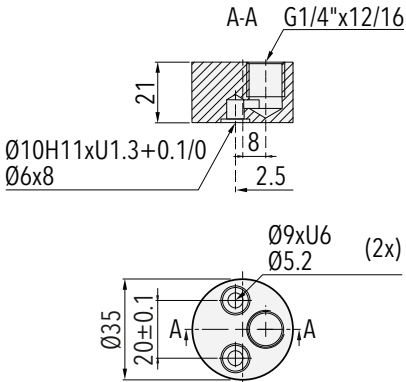Dimensions	Connection thread	Material	Ordering code
	G1/4" female G1/2" male		D4
	G1/4" female Flange connection 90°	Al anodized	V1
 M5x40 ISO4762	Fixing set M5x40	Stainless steel A4	V2
	Fixing set M5x40	Galvanised	V3
	G1/4" female Flange connection 180°	Al anodized	V5

for transmitter and pressure switches

Stop Valve

Because the Stop Valve closes automatically when an instrument is removed it allows instruments to be replaced easily without interrupting normal operation.

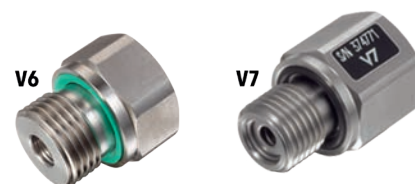


Dimensions	Connection thread	Ordering code	Seal material	Specifications
14 16.1 X Ø26.9 G1/2" G1/4" Ø29.5 Seal DIN3869 HEX27	G1/4" female G1/2" male	V6 V6-E V6-N	FKM EPDM NBR	
12 18.1 X Ø18.9 G1/4" G1/4" Ø21 O-Ring HEX19	G1/4" female G1/4" male	V7	FKM	Working pressure max. 600 bar Burst pressure 1500 bar Operating temp. -25°C ... +125°C (NBR: -25°C ... +100°C)
14 16.1 X Ø25.9 M20x1.5 G1/4" Ø29.5 Seal DIN3869 HEX 27	G1/4" female M20x1.5 male	V9	FKM	Material housing 1.4305 Material spring 1.4310 Media Water/air/light crude/heavy oil
12 18.1 X 9.7 R1/4" G1/4" Ø21 HEX19	G1/4" female R1/4" male	VA	FKM	Valve tappet position X: closed 10.6 opened 12.0 block (maximum) 12.5
16 14.1 X Ø31.9 G3/4" G1/4" Ø34.5 Seal DIN3869 HEX 32	G1/4" female G3/4" male	VB	EPDM	

Accessories

for transmitter and pressure switches






Installation of Stop valves

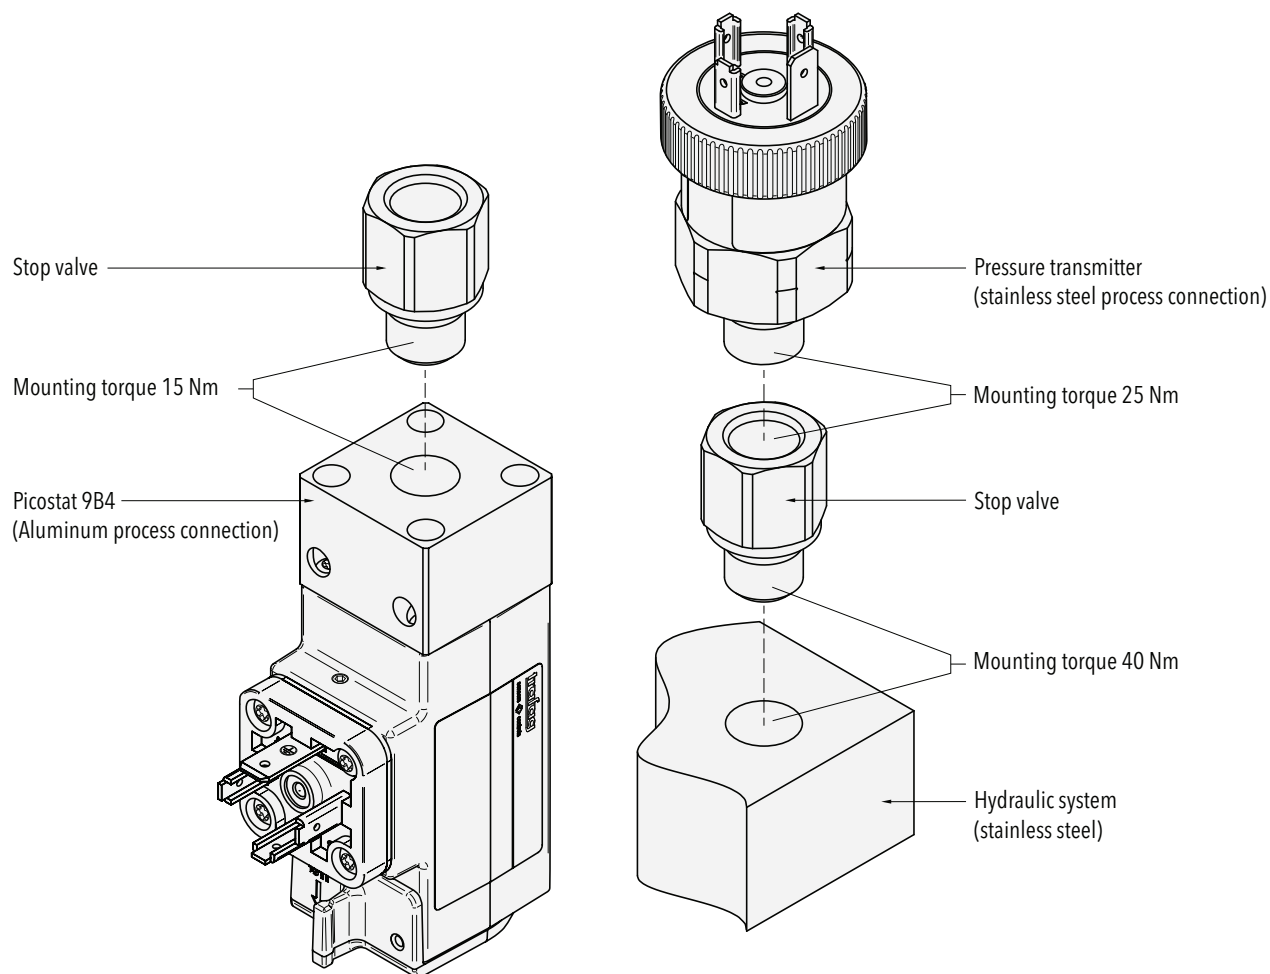

During the fitting or removing of an apparatus, the Stop Valve has to be held tight and the pressure has to be lowered to 40 bar. To avoid thread galling („cold welding“), a suitable lubrication is required.

Connection technology






Electrical plugs and cables for individual connection to interfaces

Dimensions	Female electrical plug	Specification	Accessory code ¹⁾	Ordering code
	EN 175301-803-A (DIN43650-A)	Material connector: PA Material gasket: NBR Temperature range: -40°C ... +90°C Cable diameter: 4 ... 9 mm No of poles: 3 + earth Flammability standard: UL94-V0	46	E00891
	175301-803-A (DIN43650-A)	Material connector: PA Material gasket: Silicone Temperature range: -40°C ... +125°C Cable diameter: 4 ... 9 mm No of poles: 3 + earth Flammability standard: UL94-V0	56	E00849
	EN 175301-803-A (DIN43650-A)	Material connector: PA-66 Material gasket: NBR Temperature range: -40°C ... +90°C Cable diameter: 4 ... 9.5 mm No of poles: 3 + earth Flammability standard: UL94-V2	58	E01830 F90158 ²⁾
Tighten torque 50 ... 60 Ncm 	EN 175301-803-A (DIN43650-A) with angled cable outlet (elbow)	Material connector: PA, PC Material gasket: NBR Temperature range: -40°C ... +90°C Cable diameter: 6.5 ... 9.5 mm No of poles: 3 + earth Flammability standard: UL94-V0	55	NPNCON180
	M12x1	Material connector: PA Material gasket: NBR Temperature range: -25°C ... +90°C Cable diameter: 4 ... 6 mm No of poles: 5 Flammability standard: UL94-V2	33	E00978

¹⁾ This accessory code is used in pressure transmitters and pressure switches type codes if the connector is directly ordered with the instrument.

²⁾ Ordering No for box with 50 pcs.

Connection technology

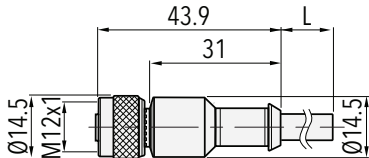Dimensions	Female electrical plug	Specification	Accessory code ¹⁾	Ordering code
	M12x1	Material connector: Housing CuZn nickel plated, Body PA-66 Temperature range: -25°C ... +85°C Cable diameter: 4 ... 6 mm No of poles: 5	35	E00977
	MIL-C 26482	Material connector: Al with ZnCo plating, Housing CuZn nickel plated Material gasket: synthetic rubber Temperature range: -55°C ... +125°C Cable diameter: 2 ... 9 mm No of poles: 6	32	E01846
	Binder 723	Material connector: Body PBT (UL 94 V-0) Temperature range: -30°C ... +95°C Cable diameter: 4 ... 6 mm No of poles: 5	37	E01911
	EN 175301-803-C	Material connector: PA-66 Material gasket: NBR Temperature range: -40°C ... +90°C Cable diameter: 4 ... 6 mm No of poles: 3 + earth	34	E00947 F90159 ²⁾
	M12x1 with moulded PUR cable 2m	Material connector: PUR Temperature range: -25°C ... +90°C Cable diameter: 5.5 mm No of wires: 5x 0.25 mm ²		E01446

¹⁾ This accessory code is used in pressure transmitters and pressure switches type codes if the connector is directly ordered with the instrument.

²⁾ Ordering No for box with 50 pcs.

SC Sensor Communicator



Handheld for parameterisation of pressure transmitters and electronic pressure switches.

Technical Data


- Identification of device data: Model, signal output, type plate, manufacturing date
 - Setting of switchpoint (8320 EPN-S)
 - CANopen: Setting of Node-ID and baudrate
 - Reset to factory settings
-

Instruction

www.trafag.com/H73699

DVB

Diagnostic Valve Block



Function tests during operation (no interruption necessary) with stop valve and test connection.

Technical Data

Measuring range	-0.8 ... 100 bar
Ambient temperature	-20°C ... +120°C

Datasheet	www.trafag.com/H72361
Instruction	www.trafag.com/H73361

THP...

Hand Pump



THP30

THP700

For testing pressure transmitters and pressure switches

Technical Data

Connection	G1/4" female
------------	--------------

Product No.	Range [bar]
THP30	-0.85 ... +25
THP700	0 ... 700, Resolution 0.2 bar

ZEN 28VDC

Switch amplifier



The zener barrier prevents the transfer of unacceptably high energy from the safe area to the hazardous area. It is mandatory for the installation of Trafag's intrinsically safe pressure transmitters.



Technical Data

Ambient temperature -20°C ... +60°C

Connection Max. 28 VDC $U_0 = 28 \text{ V}$, $I_0 = 93 \text{ mA}$, $P_0 = 650 \text{ mW}$

Ordering Code F90138

VENTBOX

Ventilated terminal box



- For the safe connection of level probes

Technical Data

Cable entry position Freely selectable with the predefined cable entries

Cable diameter 2 ... 7 mm

Strand diameter 0,14 - 2,5mm² or
AWG 28 - 12

Number of connections Max. 3 Conductor + Earth

Protection class (with correct installation) IP 66 (when using suitable installation parts in the enclosure wall),
IK07; protection class II

Material Polystyrene, grey similar
to RAL 7035

Dimensions (LxWxH) 130 x 94 x 57 mm

Ordering Code F50025

Instruction www.trafag.com/H73662

Accessories

for transmitter and pressure switches

AKL 5.5 - 9.5

Cable hanger




For the safe cable clamping of all Trafag level transmitters

Technical Data

To clamp cable with diameters of 5.5 ... 9.5 mm

Ordering Code F90138

Mounting plate MB31



For wall mounting of specific Trafag pressure transmitters and pressure switches


Technical Data

Material Steel galvanised


Suitable for N, ND, P, PS, PV, PD, PK, PVF, EXP, EXPK, EXPD

Ordering Code F90053

Screwed cable gland CG



CG18



CG24

Retrofit for pressure transmitters, - switches, thermostats
According DIN8280 for marine applications

Technical Data

Material Brass

CG18 M18x1.5
for 8...10.5 mm cable diameter

CG24 M24x1.5
for 14...16.5 mm cable diameter