

Gas Density Monitor with switching contacts



Product description

Swiss based Trafag offers precise, reliable and maintenance-free instruments developed for density monitoring of SF₆ and the full spectrum of alternative gases. Monitoring is based on the gas density reference chamber principle. Thus offering the most reliable solution on the market by directly monitoring the insulating gas density.

Applications

- High voltage technology
- Medium voltage technology

Features

- Large dial for easy readability
- Up to five galvanically separated circuits
- Fully temperature compensated
- Suitable for outdoor and indoor applications
- Compliant with SF₆ and full spectrum of alternative mixed insulation gases

 LVD: 2014/35/EU; EMC; 2014/30/EU

 LVD: 2014/35/EU; EMC; 2014/30/EU

 RoHS/Reach compliant

 SF₆-free reference chamber

Technical Data

Measuring principle	Absolute pressure reference gas measuring system
Measuring range	0 ... 1300 kPa abs. @ 20°C
Output signal	Floating change-over contact (SPDT)
Quantity of switchpoints	1 ... 5 microswitches
Ambient temperature	(-60) -40 ... +80°C

Additional information

Data sheet www.trafag.com/H72623
Instructions www.trafag.com/H73623

Ordering information/Type code

		8719	XX	XXXX	XX	XX	XX	XX
Monitor type	Axial alignment							
	One (1) microswitch	A1						
	Two (2) microswitches	A2						
	Three (3) microswitches	A3						
	Four (4) microswitches	A4						
	Five (5) microswitches ¹⁾	A5						
	Radial alignment							
	One (1) microswitch	R1						
	Two (2) microswitches	R2						
	Three (3) microswitches	R3						
	Four (4) microswitches	R4						
	Five (5) microswitches ¹⁾	R5						
Pressure connection	Threaded	7XXX						
	Flanged and cap nut	8XXX						
Indicator dial and monitor orientation	Without density indicator dial			1Z				
	Indicator dial with two colour sectors without markings							
	Monitor orientation 1	1A						
	Monitor orientation 2	2A						
	Monitor orientation 3	3A						
	Monitor orientation 4	4A						
	Partial indicator dial with sectors according to customer specification							
	Monitor orientation 1	1B						
	Monitor orientation 2	2B						
	Monitor orientation 3	3B						
	Monitor orientation 4	4B						
	Full range indicator dial according to customer specification							
	Monitor orientation 1	1C						
	Monitor orientation 2	2C						
	Monitor orientation 3	3C						
	Monitor orientation 4	4C						
Electrical connector housing configuration	Variants and details see section: Electrical connections				XX			
Cable outlet	Variants and details see table: Cable outlet configuration					XX		

	8719	XX	XXXX	XX	XX	XX	XX
Options							
Arctic temperature capability ²⁾						55	
Process gas damping element ³⁾						49	
Set-up for earthing via cable lug						26	
Integrated valve for monitor test with DN8 coupling							
Standard test port orientation (12 o'clock)						W3	
Test port orientation 180° (6 o'clock)						W0	
Test port orientation 270° (9 o'clock)						W1	
Test port orientation 90° (3 o'clock)						W2	
Integrated valve for process gas service re-filling with DN8 coupling							
Standard re-filling port orientation (12 o'clock)						F3	
Re-filling port orientation 180° (6 o'clock)						F0	
Re-filling port orientation 270° (9 o'clock)						F1	
Re-filling port orientation 90° (3 o'clock)						F2	
Accessories	Weather protection cover - please contact us for more details						

¹⁾ Upon request

²⁾ Use for temperatures down to -60°C

³⁾ Available with pressure connections 8000, 8001, 8300, 8801

Further customised parameterisation to be indicated

Process gas	SF ₆ , SF ₆ - based mixed gas, customer specific alternative gas (gas mixtures to be indicated in mol-%)
Units for indicator dial	kPa, MPa, bar, psi, kg/m ² , kg/cm ² , absolute (standard) or relative (optional) units ¹⁾ , optionally available dial indication dual units
Switchpoint @ 20°C	For each microswitch, indicate switching point p@20°C. Standard factory setting is for decreasing pressure. Optionally, factory setting for increasing pressure is available. Especially for outdoor installations in areas with high daily temperature fluctuations it is recommended to maintain a minimum switching point distance of 40-60 kPa from filling pressure to next higher and lower switching point(s). Please contact us for more information.

¹⁾ The monitoring principle is based on a density reference chamber system and is accordingly calibrated. When not using dials scaled to density expressed as "absolute pressure at 20°C of the respective gas mixture", additional environmental factors are required for correct interpretation of the dial reading. E.g. in case of using relative pressure units, local ambient pressure (e.g. altitude or weather derivations) as well as thermal effects have to be considered when comparing with a locally installed relative pressure gauge. The difference between relative and absolute pressure is calibrated to 1 bar


Microswitch and switchpoint

Monitoring	Principle	Reference gas chamber, sealed: Absolute pressure system, no influence due to ambient pressure changes, fully temperature compensated by design
	Range	0 ... 1300 kPa abs. @ 20°C ¹⁾
	Output	Floating change-over contact (SPDT)
	Accuracy	Refer to sections „Density indicator“ and „Switchpoint accuracy over temperature based on reference chamber pressure“
Microswitch	Output signal	Floating change-over contact (SPDT)
	Resistive load (inductive load)	AC - 250 V/10 (1.5) A DC - 250 V/0.1 (0.05) A, 220 V/0.25 (0.2) A, 110 V/0.5 (0.3) A, 24 V/2 (1) A
	Resistance of insulation	>100 MΩ, 500 VDC, ex factory
	Dielectric strength	2 kVAC, 50Hz, terminal to ground (earth)
	Switching cycle capacity	Up to 1 milion mechanical, more than 10'000 with maximum load
	Effect of vibration	4 g / 20 ... 100 Hz effects no contact bounce at 5 kPa minimum distance from set switchpoint
Switchpoint setting	Factory adjustment	Standard setting is for decreasing pressure
	Lowest switchpoint setting	120 kPa abs. @ 20°C
	Highest switchpoint setting	1300 kPa @ 20°C for partial range or none indication 1250 kPa @ 20°C for full range indication
	Distance from the lowest to the highest switchpoint ²⁾	Up to 250 kPa @ 20°C for partial range or none indication Up to 180 kPa @ 20°C for full range indication
	Switching differential	3 ... 7 kPa typ. (15 kPa max.) if lowest to highest switchpoint distance is up to 130 kPa 5 ... 10 kPa typ. (20 kPa max.) if lowest to highest switchpoint distance is 130 ... 180 kPa 7 ... 12 kPa typ. (25 kPa max.) if lowest to highest switchpoint distance is 180 ... 250 kPa

¹⁾ Gas in closed compartments follow specific isochores and therefore the specific operating temperature range has to be considered in respect to overpressure. E.g. 1200 kPa abs. air @ 20°C shifts to 1330 kPa abs. @ 50°C. Please contact us for more information


²⁾ Distance from lock-out to high-alarm pressure, or from lock-out to filling pressure (no high-alarm)

Overview switchpoint settings



Lowest switchpoint setting:
120 kPa abs. @ 20°C for partial and full range indication

Distance from lowest to highest switchpoint:
Up to 250 kPa @ 20°C for partial range indication



Highest switchpoint setting:
1300 kPa @ 20°C for partial range or none indication

Distance from lowest to highest switchpoint:
Up to 180 kPa @ 20°C for full range indication

Switchpoint accuracy over temperature based on reference chamber pressure

Temperature range		+20°C	-25°C ... +50°C	-40°C ... +60°C	-60°C ... +60°C
		Standard	Standard	Standard	With artic option
First alarm switchpoint setting pressure abs. @ 20°C ¹⁾					
≤ 650 kPa	[kPa max.]	± 8	± 10	± 12	± 15
> 650 kPa to 1000kPa	[kPa max.]	± 8	± 12	± 14	± 18
> 1000kPa	[kPa max.]	± 12 ³⁾	± 17	± 20	± 25
High pressure alarm ^{1) 2)}					
≤ 1000 kPa	[kPa max.]	± 10	± 16	± 20	± 25
> 1000kPa	[kPa max.]	± 12	± 19	± 22	± 27

¹⁾ While no liquefaction occurs and the insulation gas is completely gaseous

²⁾ Only applicable if factory adjustment includes high-alarm switchpoint above filling pressure

³⁾ Available upon request

Density indicator

	Partial range dial	Full range dial
Indicator principle	Absolute pressure, fully temperature compensated by means of sealed reference gas chamber. Meter movement operated by reference gas chamber	
Visible dial diameter	75 mm	
Scale	Single or double, switchpoint indication and selectable sections with different colours	
Unit	See table: Further customised parameterisation to be indicated	
Numbered range	Up to 250 kPa @ 20°C between lowest and highest indicated value ¹⁾	Up to 180 kPa @ 20°C between lowest and highest indicated value ¹⁾ completed by a low pressure indication down to vacuum
Accuracy @ 20°C within numbered range	± 10 kPa @ 20°C	Switchpoint range: ± 15 kPa @ 20°C Low pressure range: ± 25 kPa @ 20°C at 100 kPa abs. ± 12 % MV @ 20°C for remaining actual values

¹⁾ Typically ranges are from lock-out switchpoint to filling pressure (no high-alarm), or from lock-out switchpoint to high-alarm switchpoint

The density indicator is based on the density reference chamber system and is accordingly calibrated. Over the whole dial range, it indicates density, not pressure. When not using dials scaled to density expressed as „absolute pressure at 20°C of the respective gas mixture“, additional environmental factors are required for correct interpretation of the dial reading. E.g. in case of using relative pressure units, local ambient pressure (e.g. altitude or weather derivations) as well as thermal effects have to be considered when comparing with a locally installed relative pressure gauge. The difference between relative and absolute pressure is calibrated to 1 bar.

For more information, see <https://www.trafag.com/H70376>


Density indicator dial according to customer specification



Indicator dial with two colour sectors without markings

8719.XX.XXXX.XX.


1A/2A/3A/4A.XX.XX.XX.XX



Partial indicator dial with sectors according to customer specification

8719.XX.XXXX.XX.

1B/2B/3B/4B.XX.XX.XX.XX




Full range indicator dial according to customer specifications

8719.XX.XXXX.XX.

1C/2C/3C/4C.XX.XX.XX.XX


Example of axial gas density monitor with full range indicator dial

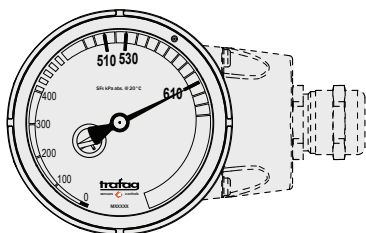

8719.AX.XXXX.XX.1C.XX.XX.XX.XX

For complete choice of monitor and dial alignments see section "Monitor and indicator dial orientation"

Axial gas density monitor without indicator dial

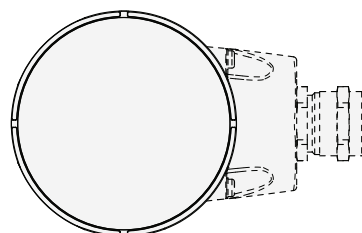


8719.AX.XXXX.XX.1Z.XX.XX.XX.XX

Monitor and indicator dial orientation for axial alignment configuration


Electrical connector housing is configurable for 12/3/6/9 o'clock orientation. The indicator dial is generally horizontally oriented to ensure optimal readability. The examples shown illustrate a full range indicator dial. The same applies to the other dial variants.

Refer to chapter installation for specific requirements for outdoor installation settings.

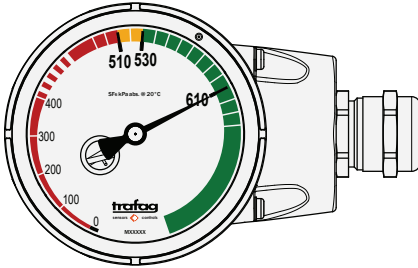


Orientation 1 with electrical connector housing in 3 o'clock alignment

8719.AX.XXXX.XX.1A/1B/1C.XX.XX.XX.XX

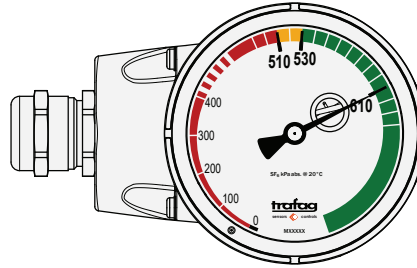


Orientation 2 with electrical connector housing in 9 o'clock alignment

8719.AX.XXXX.XX.2A/2B/2C.XX.XX.XX.XX

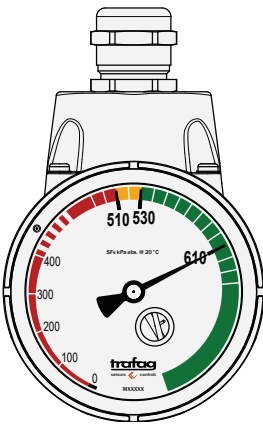

Orientation 3 with electrical connector housing in 12 o'clock alignment

8719.AX.XXXX.XX.3A/3B/3C.XX.XX.XX.XX

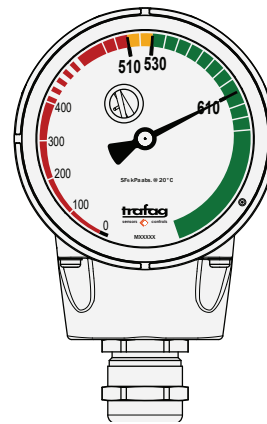


Orientation 4 with electrical connector housing in 6 o'clock alignment

8719.AX.XXXX.XX.4A/4B/4C.XX.XX.XX.XX

Monitor and indicator dial orientation for radial alignment configuration


Process connection and related electrical connector housing are configurable for 12/3/6/9 o'clock orientation. The indicator dial is generally horizontally oriented to ensure optimal readability. The examples shown illustrate a full range indicator dial. The same applies to the other dial variants.

Refer to chapter installation for specific requirements for outdoor installation settings.

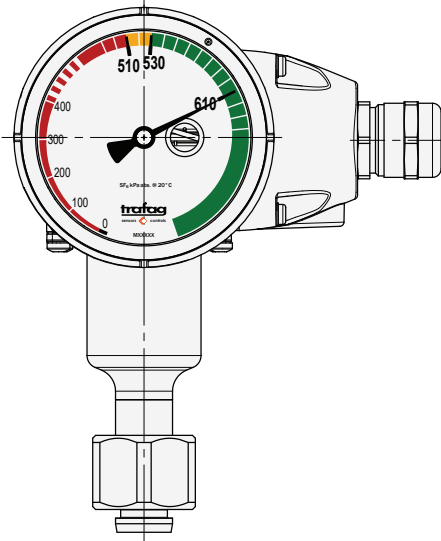


Orientation 1 with process connection in 6 o'clock alignment and electrical connector housing in 3 o'clock alignment

8719.RX.XXXX.XX.1A/1B/1C.XX.XX.XX.XX

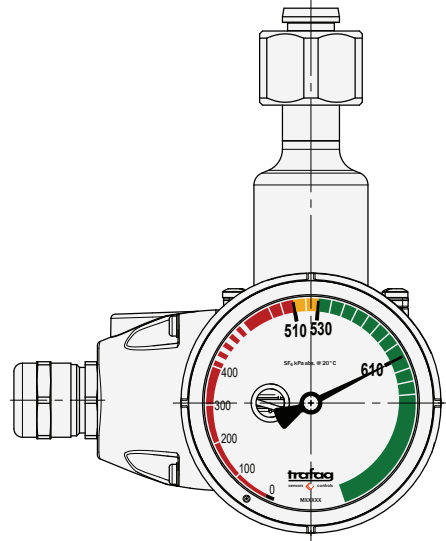


Orientation 2 with process connection in 12 o'clock alignment and electrical connector housing in 9 o'clock alignment

8719.RX.XXXX.XX.2A/2B/2C.XX.XX.XX.XX

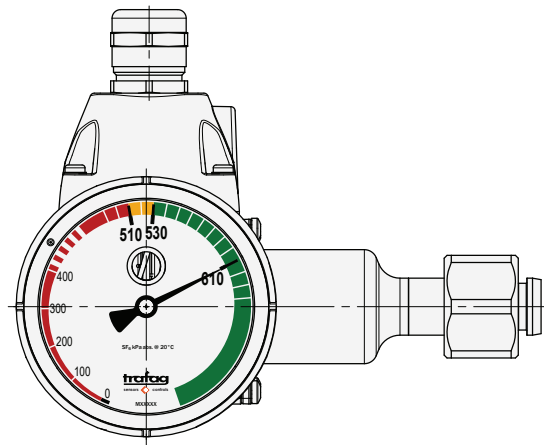

Orientation 3 with process connection in 3 o'clock alignment and electrical connector housing in 12 o'clock alignment

8719.RX.XXXX.XX.3A/3B/3C.XX.XX.XX.XX

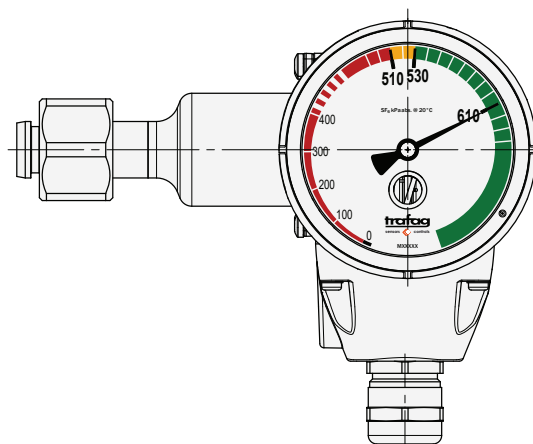

Orientation 4 with process connection in 9 o'clock alignment and electrical connector housing in 6 o'clock alignment

8719.RX.XXXX.XX.4A/4B/4C.XX.XX.XX.XX

General specifications

Environmental conditions	Ambient temperature	(-60°C) -40°C ... +80°C
	Altitude	max. 2000m for installations under Low Voltage Directive 2014/35/EU
	Protection ¹⁾	IP65 and IP67
	Humidity	IEC 60068-2-30 (damp heat, cyclic, 100 % RH @ +55°C), membrane provides condensation compensation
	Overpressure	1500 kPa abs.
	Shock	70 g, 6 ms, 10'000 times at all axes excited on process connection without damage to instrument ²⁾
	Routine inspection of gas tightness	Integral pressure testing with helium, leakage detection rate < 7·10 ⁻⁸ mbar · l/s
Mechanical data	Process gas wetted material	Process connection and measuring system: 1.4404, 1.4571 (AISI316L, AISI316Ti) Test and re-filling valve: 1.4404 (AISI316L), CuZn39Pb3 (C38500) Sealing: CIIR ³⁾
	Housing	AlSi10Mg, powder coated
	Screwed cable gland	Brass nickel-plated, PA as option
	Dial	Dial window: PMMA Dial face: PC Pointer: Aluminium sheet
	Weight	Gas density monitor: ~ 900 ... 1100 g Gas density monitor with integrated test or re-filling valve: ~ 1200 ... 1400 g

¹⁾ While using appropriate cable gland and/or mating connector mounted according to instruction


²⁾ Density monitor is configurable for different process connections or valve options that affect the overall dimensions.
Maximum shock level shall be limited to 120 g measured at dial window

³⁾ Sealing only applicable for certain process connections as monitor itself has no internal sealings


Electrical data switch

Standard wiring terminal(s)	
Number of microswitches according to customer application	Up to three (3) switches connected via wire terminal block A Up to two (2) more switches connected via wire terminal block B ¹⁾
Wire terminal blocks	Plugable, for 0.2 ... 2.5mm ² wiring Terminal block A: 10-pins Terminal block B: 6-pins

¹⁾ Wire terminal block B only applicable if monitor is configured with four (4) or five (5) microswitches

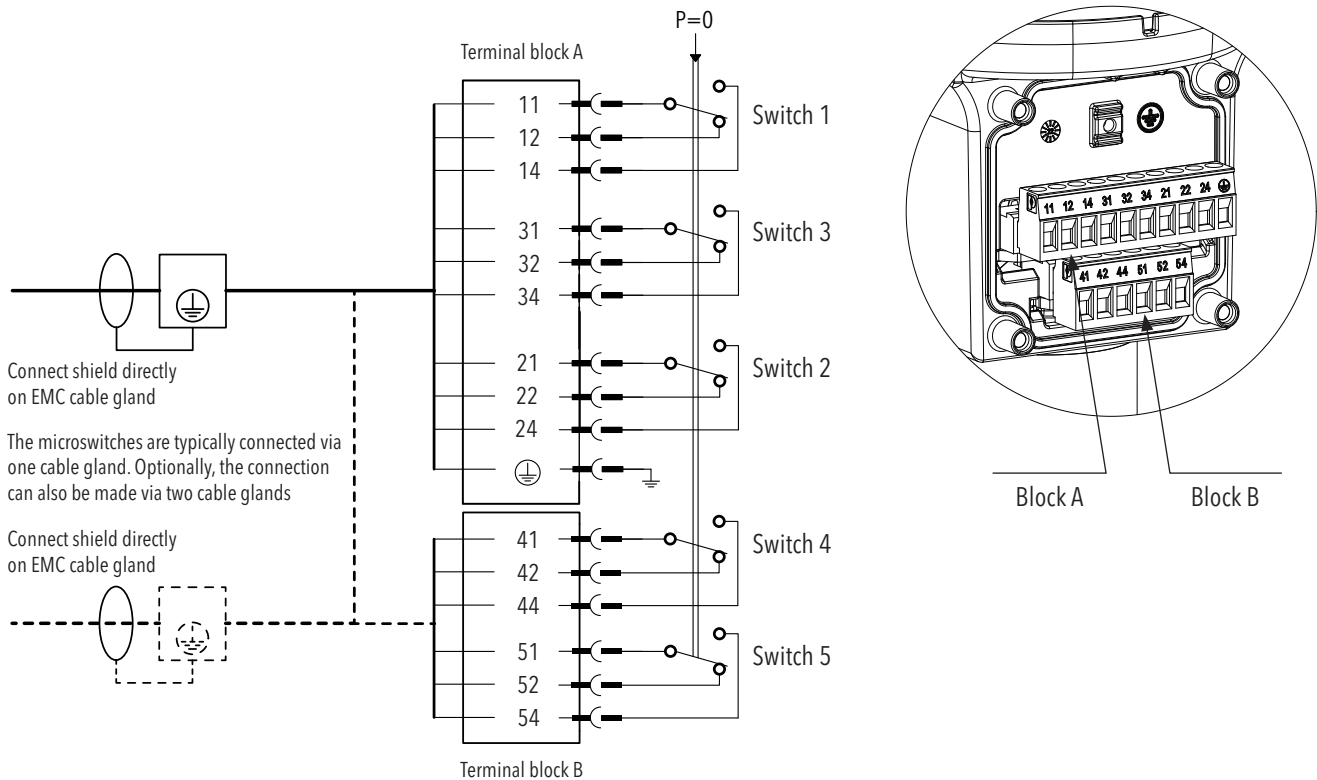


Microswitch in non-pressurised condition ($p_{rel} = 0$)

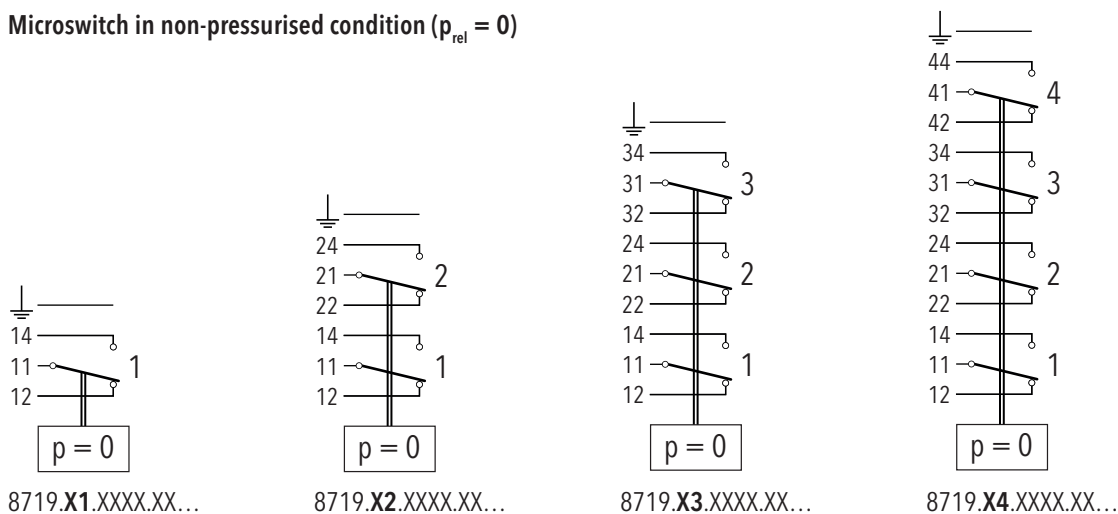

 Connected with all electrically conductive elements of the density monitor

Electrical connections


Electrical connector housing configuration, Material AISi10Mg, powder coated

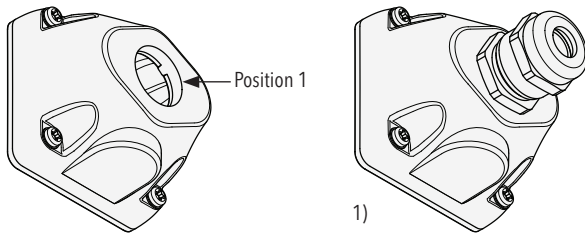

1-thread, horizontal cable outlet

M25x1.5 **8719.XX.XXXX.XX.XX.XX.A1...**


M20x1.5 **8719.XX.XXXX.XX.XX.XX.A2...** ²⁾



1-thread, lateral cable outlet

M25x1.5 **8719.XX.XXXX.XX.XX.XX.B1...**


M20x1.5 **8719.XX.XXXX.XX.XX.XX.B2...** ²⁾

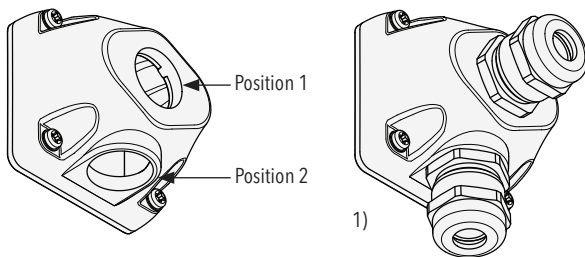

2-threads, horizontal and lateral cable outlets

M25x1.5 horizontal **8719.XX.XXXX.XX.XX.XX.C1...**


M25x1.5 lateral

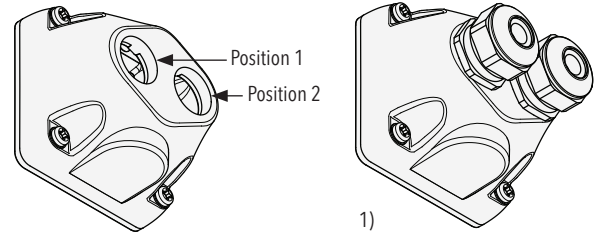

2-threads, horizontal cable outlets

M20x1.5, M20x1.5 **8719.XX.XXXX.XX.XX.XX.D1...** ²⁾

Electrical connector housing configuration, Material Polyamide (PA)

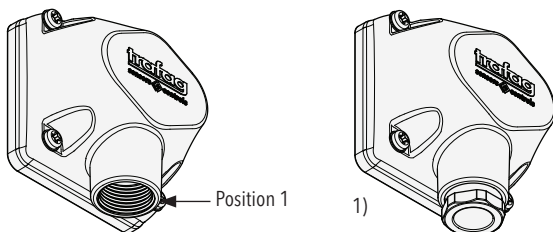



1-thread, lateral cable outlet

M20x1.5 **8719.XX.XXXX.XX.XX.XX.E1...**

¹⁾ Example with mounted cable gland

²⁾ Upon request, whereas minimum order quantities may apply

Cable outlet configuration


Cable gland		Material	For cable	Ingress protection	Cable outlet options (type code)
	M20x1.5	Brass, nickel-plated	ø 7 ... 12.5 mm	IP 65 and IP 67	10
	M25x1.5	Brass, nickel-plated	ø 8 ... 16 mm	IP 65 and IP 67	11
Cable gland insert ¹⁾ 	M20x1.5	Polyamide (PA)	ø 7 ... 13 mm	IP 65	09 ²⁾
Blank plug 	M20x1.5	Brass, nickel-plated		IP 65 and IP 67	U2
		Polyamide (PA)		Without IP compatibility, not for use in operation	02
	M25x1.5	Brass, nickel-plated		IP 65 and IP 67	04
		Polyamide (PA)		Without IP compatibility, not for use in operation	05

¹⁾ Only with polyamide housing configuration

²⁾ Only with PA electrical connector housing (E1)

Examples

Possible cable outlet combinations for a 2-threads electrical connector housing

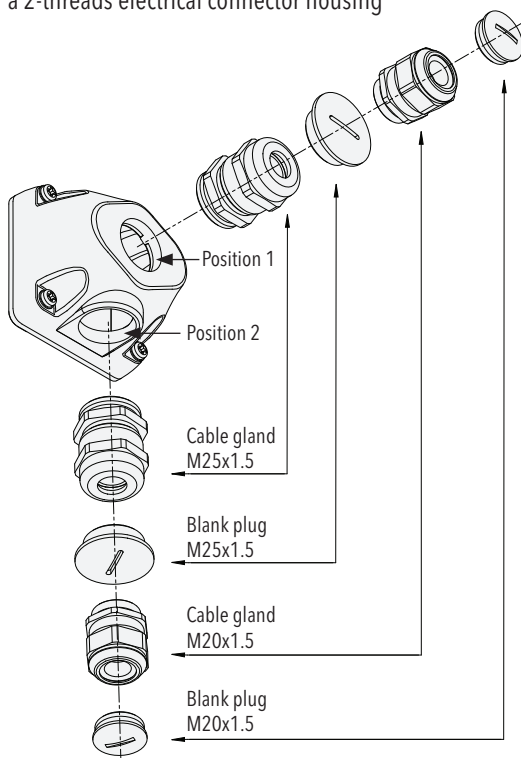

Example 1: 8719.XX.XXXX.XX.C1.17.10.XX...

- Cable connector housing with M25x1.5, horizontal and M25x1.5, lateral threads (option C1)
- EMC-cable gland M25x1.5 for cable ø8 ... 16 mm and EMC-cable gland M20x1.5 for cable ø7 ... 12.5 mm (options 11 and 10)

Example 2: 8719.XX.XXXX.XX.D1.07.07.XX...


- Cable connector housing with 2-threads M20x1.5, horizontal (option D1)
- Two equal EMC-cable glands M20x1.5 for cable ø7 ... 12.5 mm (options 10 and 10)

Example 3: 8719.XX.XXXX.XX.B1.11.XX...

- Cable connector housing with M25x1.5, lateral thread (option B1)
- EMC-cable gland M25x1.5 for cable ø8 ... 16 mm (option 11)


Main dimensions of density monitor

Example model with axial process connection

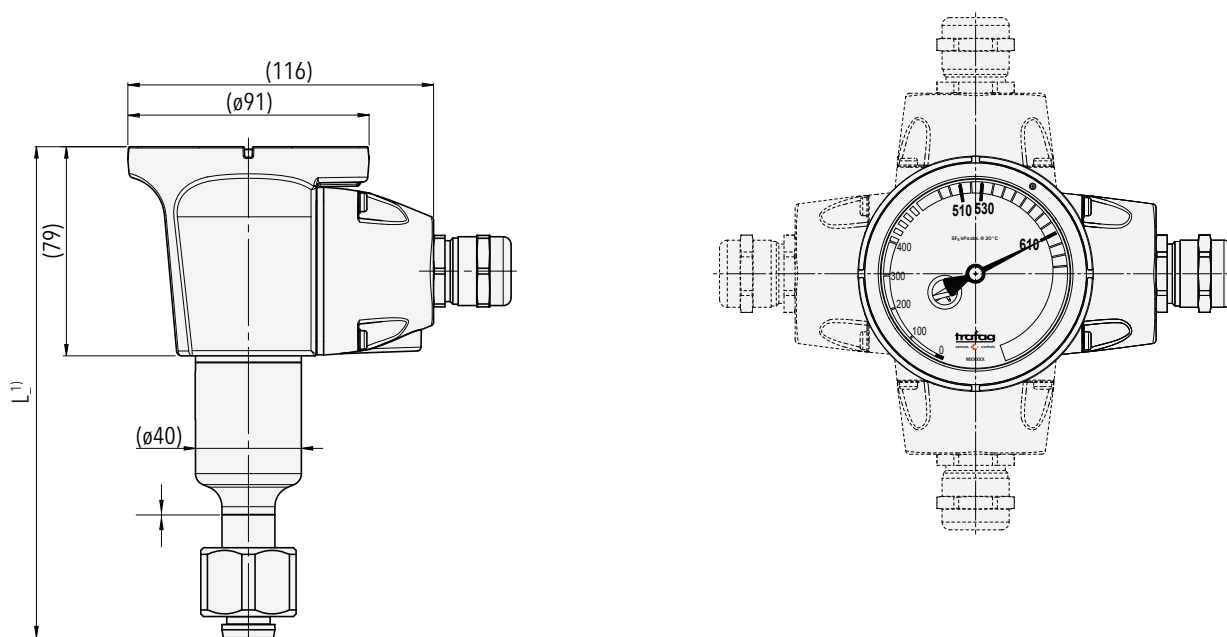

8719.AX.8XXX.XX.XX.XX.XX...

Example model with radial process connection

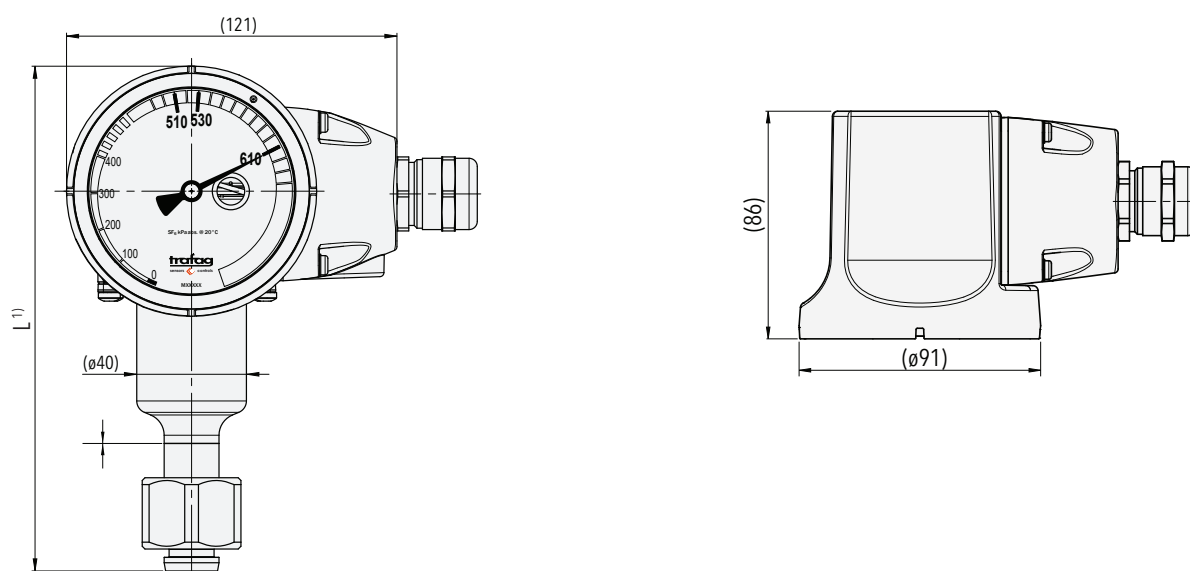


8719.RX.8XXX.XX.XX.XX.XX...

¹⁾ See table: Process connections


Installation

	Indoor application	Outdoor application
Installation orientation	No limitations, any orientation possible	- A complete vertical downward orientation of the monitor or the dial face shall be avoided to ensure the functionality of the membrane providing condensation compensation - Consider a proper cable bending radius to ensure tightness of the cable connection. A complete vertical upward installation of the cable shall be avoided
Recommended option	None	Weather protection cover recommended. Please contact us for more details.

Specifications for axial type alignment installation

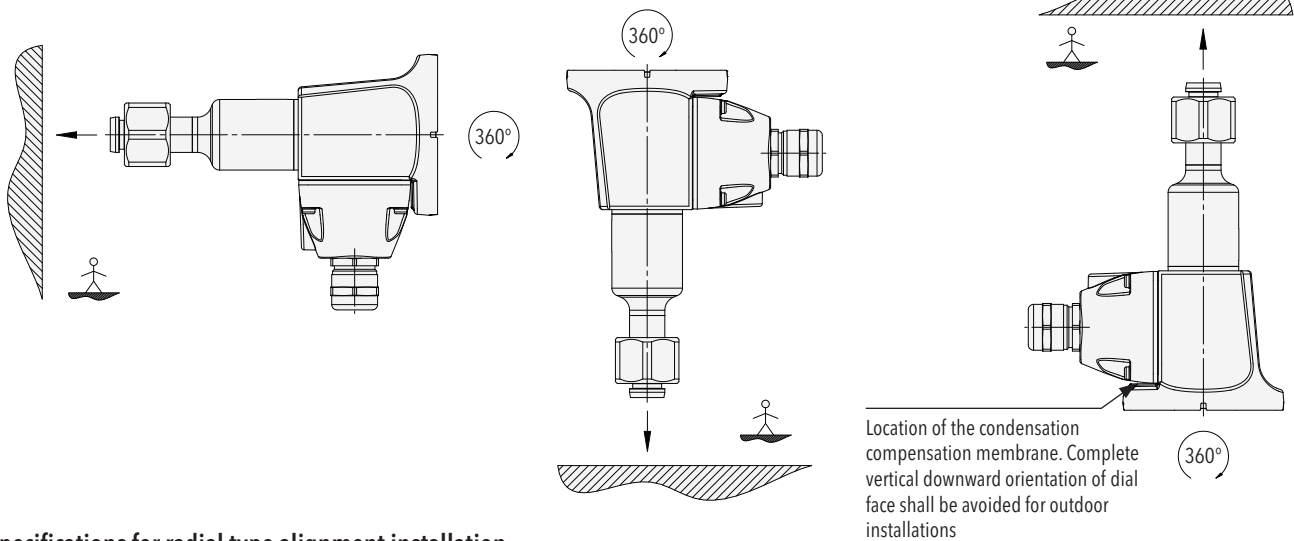


Specifications for radial type alignment installation

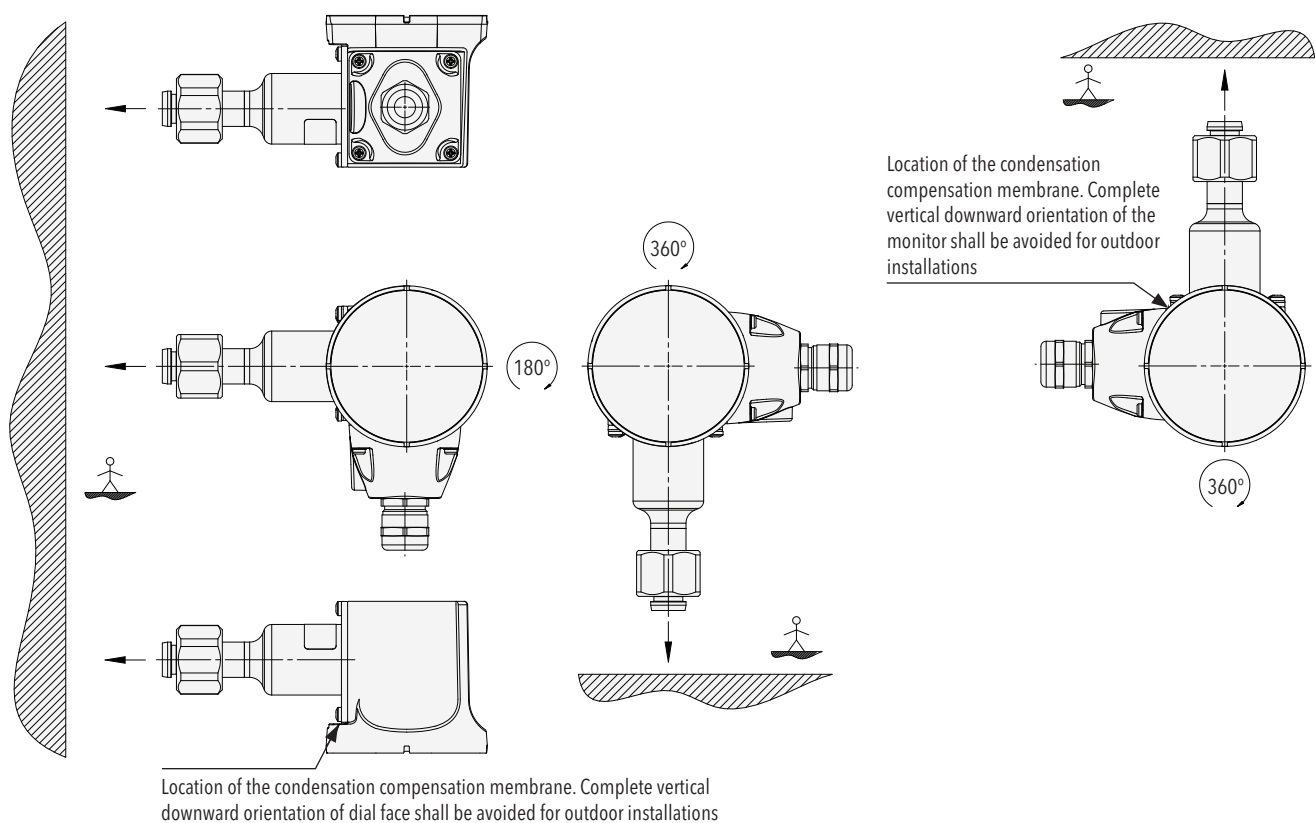


Process connections

		L = Length to top edge of density monitor [mm]			
Alignment		Axial 8719.AX.XXXX. ...		Radial 8719.RX.XXXX. ...	
Valve		without	with	without	with
Threaded	7000	168	198	167	197
Cap nut	8300	185.5	215.5	184.5	214.5
	8550	160.5	190.5	159.5	189.5
	8570	166	196	165	195


i Delivery includes assembly kit and O-Ring set where applicable.




Threaded connection G1/2"
8719.XX.7000.XX.XX.XX.XX...




DN8 connection
8719.XX.8550.XX.XX.XX.XX...

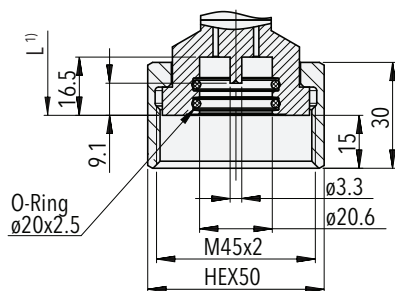

DN20 connection
8719.XX.8570.XX.XX.XX.XX...



Cap nut connection
8719.XX.8300.XX.XX.XX.XX...

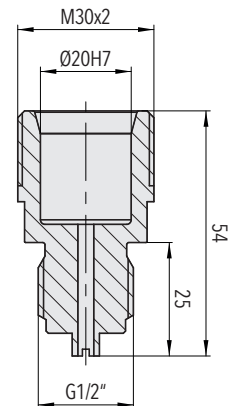

Adapter 2300 - G1/2" male for rotatable
G1/2" pressure connection
8719.XX.8300.XX.XX.XX.N1


¹⁾ See table: Process connections

Valve options

Integrated valve for density monitor test ¹⁾

Test valve allows in-situ monitor verification without dismounting from pressure compartment. Test equipment is connected via DN8 port. Connection port is configurable for direction W0/W1/W2/W3.


Example model with integrated valve and axial aligned process connection

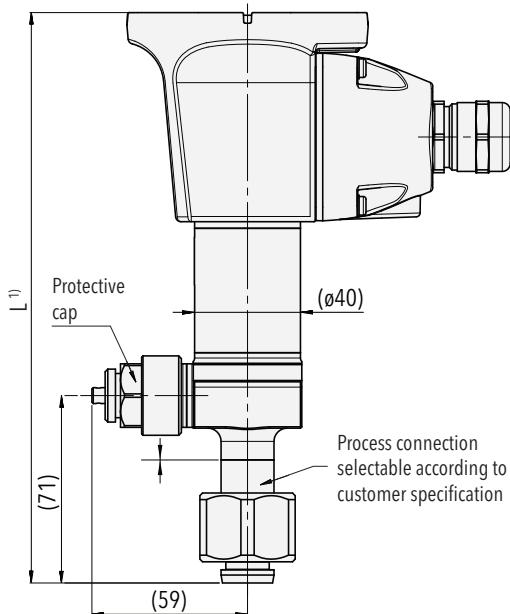

Integrated valve for process gas service and re-filling ¹⁾


Valve allows in-situ analysing of gas quality and direct insulating gas replenishment of pressure compartment via DN8 port on re-filling valve. Connection port is configurable for direction F0/F1/F2/F3.

Example model with integrated valve and radial aligned process connection

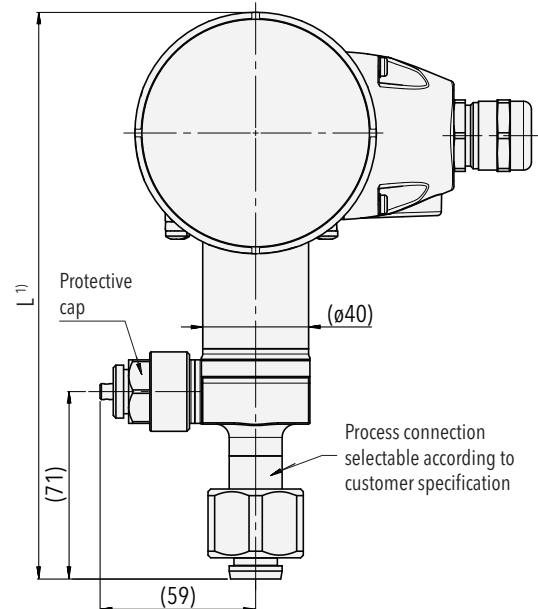


Orientation service connection (top view, valve port orientation is identical for axial and radial types)
 Please specify port direction when ordering

Top view axial alignment

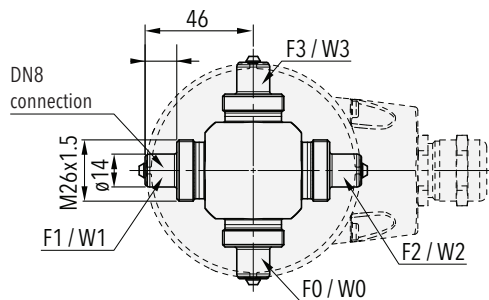

Top view radial alignment

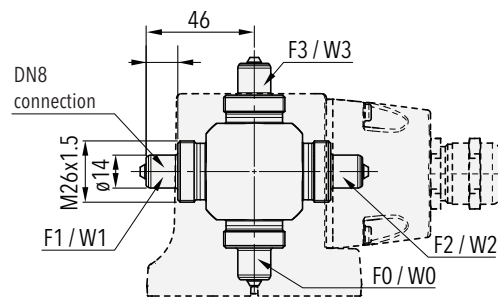

8719.AX.XXXX.XX.XX.XX.XX.W0/F0/W1/F1/W2/F2/W3/F3.XX

8719.RX.XXXX.XX.XX.XX.XX.W0/F0/W1/F1/W2/F2/W3/F3.XX

Operating specification for test and re-filling valve:

Opening and closing shall be limited to temperature range of -25°C ... +50°C.
 Mechanical lifetime min. 250 actuation cycles.

F3/W3 (12 o'clock, Standard orientation)
 F0/W0 (6 o'clock, 180° orientation)
 F1/W1 (9 o'clock, 270° orientation)
 F2/W2 (3 o'clock, 90° orientation)

 For more details see instruction: www.trafag.com/H73623

¹⁾ The outer dimensions for both valves with the respective axis alignment type are the same
 See table: Process connections

Reliable quality


Worldwide represented, globally trusted, Swiss based

Trafag develops, manufactures and markets accurate, robust, and maintenance-free instruments for monitoring SF₆ and alternative insulating gases in high and medium voltage switchgear. Trafag also offers a wide range of pressure and temperature monitoring products for various applications.

All innovative products and key components are designed in-house by Trafag's research and development departments in Switzerland, Germany and India and are then produced in the

manufacturing sites in Switzerland, Germany, Czech Republic, and India. Strict quality management in accordance with ISO 9001 and ISO 14001 ensure that Trafag products meet the required quality and sustainability standards.

Trafag is headquartered in Switzerland, was founded in 1942 and has an extensive sales and service network in more than 40 countries worldwide.

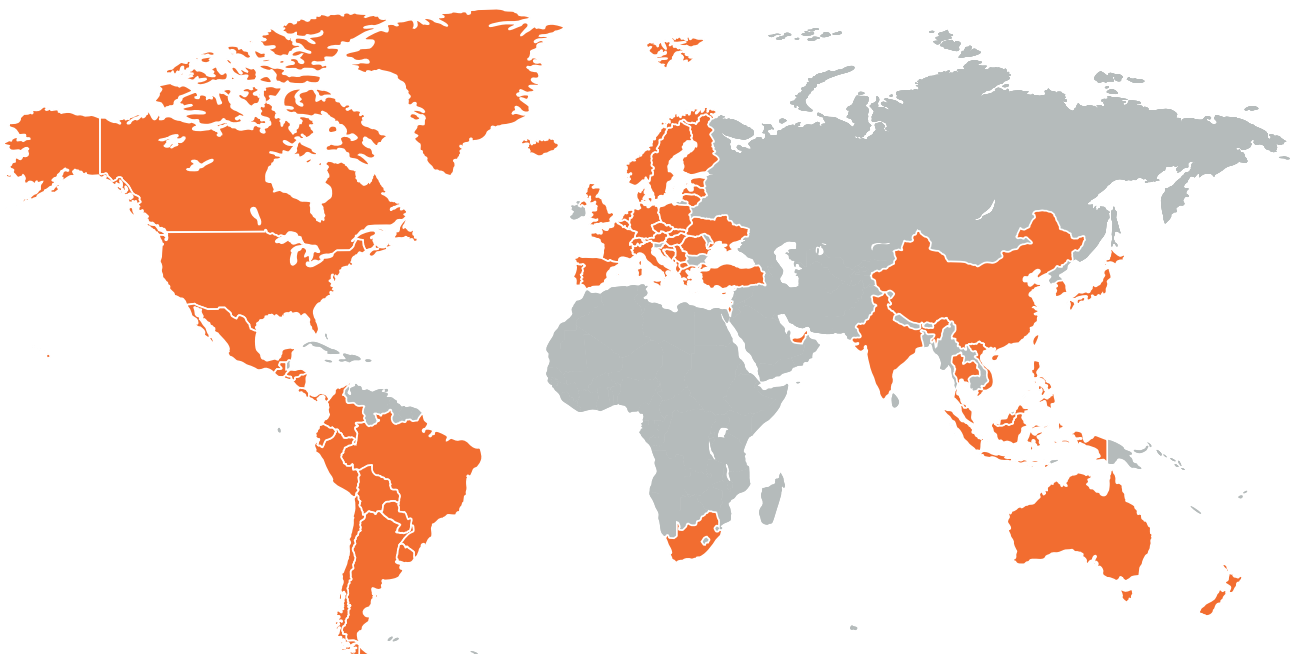

Headquarters Switzerland

Trafag AG
Industriestrasse 11
8608 Bubikon (Switzerland)
+41 44 922 32 32
trafag@trafag.com
www.trafag.com

Coordinates of representatives can be found at www.trafag.com/trafag-worldwide



Pressure transmitters



Electronic pressure switches



Mechanical pressure switches



Pressure gauge



Thermostats



Temperature transmitters



Gas density